

TULLU TOP

Introducing



TULLU TOP AC 170



TULLU TOP AC 150



TULLU TOP VIRAT



TULLU TOP AC 110

Since 1965
TULLU TOP
Only
Pump you can
rely upon



TULLU TOP 0.50 HP



TULLU TOP SHARK



TULLU TOP AC 70

Self Priming Monoblock Pumps

Model	Drive	Watt	Insulation	Total Head	Max Dis.	Connection
AC 170	1.125 kw	1400w	'B' Class	55 mtrs	3500 LPH	25x25 mm
AC 150	0.83 kw	1000w	'B' Class	45 mtrs	3500 LPH	25x25 mm
Virat	0.75 kw	600w	'B' Class	37 mtrs	2550 LPH	25x25 mm
AC 110	0.37 kw	525w	'B' Class	33 mtrs	2800 LPH	25x25 mm
AC 100	1/2 HP	500w	'B' Class	30 mtrs	2400 LPH	25x25 mm
0.50 HP	0.37 kw	525w	'B' Class	33 mtrs	2800 LPH	25x25 mm
SHARK	1/2 HP	400w	'B' Class	24 mtrs	2000 LPH	25x25 mm
AC 70	0.15kw	265w	'B' Class	21 mtrs	1900 LPH	19x19 mm



TULLU TOP 80



TULLU TOP 60 (Super)



TULLU TOP 50 (Mini Super)

Universal (AC/DC)

Model	Total Head	Suc. Head	Discharge	Connection	Consumption	R.P.M.	Drive
T-80	24 mtrs	3 mtrs	800 LPH	19x19	270 w	6500	0.125 kw
T-60 (Super)	18 mtrs	1.5 mtrs	900 LPH	19x19	250 w	6500	0.125 kw
T-50 (Mini Super)	15 mtrs	1.5 mtrs	500 LPH	13x13	120 w	7000	0.060 kw



TULLU TOP AC 10



TULLU TOP AC 15



TULLU TOP AC 30



TULLU TOP AC 50



TULLU TOP AC-DP



View of Front Unit

Introducing

TULLU TOP Trust Models



0.50 HP (100)



0.75 HP (120)



1.0 HP (150)

Mini Centrifugal (A.C.)

Model	Total Head	Suc. Head	Discharge	Connection	Consumption	R.P.M.	Drive
AC-10	3 mtrs	0.5 mtrs	350 LPH	13x13	55 w	2800	0.025 kw
AC-15	4.5 mtrs	0.5 mtrs	300 LPH	13x13	60 w	2800	0.028 kw
AC-30	9 mtrs	1.4 mtrs	500 LPH	13x13	160 w	2800	0.062 kw
AC-50	15 mtrs	1.4 mtrs	450 LPH	13x13	190 w	2800	0.15 kw
AC-DP	5 mtrs	1.4 mtrs	500 LPH	13x13	150 w	2800	0.26 kw

Trust Models

Model	Power Kw / HP	Pipe Size	Head in Meters							
			8	12	15	21	28	30	36	42
TP 100 SP	0.37 / 0.5	25x25mm	2400	1975	1565	1050	600			
TP 125 SP	0.55 / 0.75	25x25mm	3000	2420	1920	1620	1280	1080	600	
TP 150 SP	0.75 / 1.0	25x25mm	2800	2525	2050	1700	1500	1400	1025	650

TULLU TOP

Trust Models

Booty Trust



TULLU TOP AUTOMATIC PRESSURE BOOSTER PUMPS

Mini Booster Pump

Model	Volt	Frequency	Watt	Total Head	Max Dis.	Connection
TP-90	220-240	50Hz	100w	9 mtrs	23 LPM	20x20 mm
TP-120	220-240	50Hz	248w	13 mtrs	60 LPM	25x25 mm



TULLU TOP SHALLOWELL PUMP

Shallowell Pumps

Model	Drive	Watt	Insulation	Total Head	Max Dis.	Connection
1.1 HP	0.83 kw	640w	'B' Class	35 mtrs	50 LPM	25x25 mm



TULLU TOP OPENWELL SUBMERSIBLE PUMPS

Openwell Pumps

Model	Power Kw / HP	Pipe Size	Discharge in LPH	Head in Meter	18	20	24	26	32
TOW 50	0.37/0.5	25x25mm	10700	9400	7900	5950	5450		
TOW 100	0.75/1.0	32x25mm	13000	12500	11300	10200	9450	6300	5500
TOW 150	1.1/1.5	32x25mm							



Submersible Cooler Pumps

Model	Total Head	Discharge	Consumption	Volts
THS-1250	1.50 Mtrs.	700 LPH	15w	240/50Hz
THS-3000	3.00 Mtrs	1200 LPH	35w	240/50Hz

TULLU TOP SUBMERSIBLE COOLER PUMPS



TULLU TOP FHP Motors

FHP Motors (AC)

Model	Drive	Supply
1/12	0.062 kw	230V/50Hz
1/8	0.09 kw	230V/50Hz
1/5	0.15 kw	230V/50Hz
1/4	0.19 kw	230V/50Hz

We also custom manufacture motors as per specific OEM requirements.

Booty

Trust

750
Watts

12
Month
Warranty

3
Stainless Steel
Jar

M 1000

M 100



Sewing Machine Motor (AC/DC) F.H.P. Motors (AC/DC)

Sewing Machine Motor (AC/DC)

F.H.P. Motors (AC/DC)

Model	Kw	(HP)	RATING	RPM (On Load)	CURRENT (AMP)	CONSUMPTION (WATTS)
Domestic	0.047	(1/16)	(20 Mnts)	6000	0.80	160
Commercial	0.050	(1/15)	Cont.	5000	0.85	145
Deluxe Commercial	0.062	(1/12)	Cont.	7500	0.85	170

Supplied with Foot regulator for speed regulation. Necessary accessories such as Bracket V.Belt, Base Plate provided free of cost.

Range : From 0.125kw (1/8HP) to 0.019kw (1/40HP)

Rating : Continuous, Intermittent as per requirement suitable for various types of domestic & industrial besides engineering and scientific applications.

Mkd. by - **TULLU MARKETING & SALES**

C- 26/34 B-D, Siddham Complex, Ramkatora Road, Varanasi- 221001

E-mail : tullumarketing@gmail.com Website : www.tullutop.com

CUSTOMER CARE : 09935590563

www.facebook.com/tullupumps

www.instagram.com/tullupumps

www.in.linkedin.com/company/tullu-motors-pvt-ltd

www.twitter.com/tullupumps

TULLU TOP

S^{SUN}LAR PUMP SERIES



0.5 HP 24 Volt DC



Mini Solar

(Standard pump available in 24 Volt DC, 36 Volt DC and 48 Volt DC. It can also be customized as per client requirement).

- ◆ **Harnessing Natural SOLAR Power**
- ◆ **Reducing Carbon Footprint**
- ◆ **Saving Natural Resources of India for Our Future Generations**
- ◆ **Environmental Friendly**
- ◆ **Taking India to the Next Level of Water Pumping Solutions**

Technical Specifications

Model	TULLU TOP Solar Pump 0.5 H.P. 24 Volt DC	TULLU TOP Mini Solar Pump 100 Volt AC/DC
Drive	0.37 Kw	0.050 Kw
Output Watt	260 W	80 W
Insulation	"B" Class	"E" Class
Total Head	23 Mtrs	15 Mtrs
Suction Head	8 Mtrs	1 Mtr
Max. Discharge	2300 LPH	500 LPH
Connection	25x25	13x13



TULLU MOTORS PVT. LTD.

S 9/471, Nai Basti, Pandeypur, Varanasi-221002 (U.P.)

E-mail : tullu.motors@gmail.com

Website : www.tullutop.com

Customer Care No.- 9935590563

TULLU TOP

OUR PRODUCT RANGE



FARRATA FANS



FARRATA FANS



AC MONOBLOCK PUMPS



SPECIAL PURPOSE
CENTRIFUGAL PUMPS



AUTOMATIC MINI
PRESSURE BOOSTER PUMPS



PRESSURE BOOSTER PUMPS



SUBMERSIBLE
COOLER PUMPS



FHP MOTORS

TULLU TOP

PRESSURE BOOSTER PUMPS

- High water pressure at all times.
- Suited both for homes as well as commercial establishments.
- No longer you will ever face problem of inadequate water pressure.



Model : PCS 0.5 HP
 Suitable for 2 Bathrooms
 Supply AC 230 V/50 Hz
 Drive : 0.5 HP
 Total Head : 33 mtrs
 Maximum Discharge : 2800 LPH

Model : PCS 0.75 KW
 Suitable for 3 Bathrooms
 Supply AC 230 V/50 Hz
 Drive : 0.75 KW
 Total Head : 37 mtrs
 Maximum Discharge : 2550 LPH

Model : PCS 1.0 HP
 Suitable for 4 to 5 Bathrooms
 Supply AC 230 V/50 Hz
 Drive : 1.0 HP
 Total Head : 45 mtrs
 Maximum Discharge : 3500 LPH

Model : PCS Shallowell Pump 1.1 HP
 Suitable for 4 to 5 Bathrooms with very high water pressure
 Supply AC 230 V/50 Hz
 Drive : 0.83 KW
 Total Head : 35mtrs
 Maximum Discharge : 3000 LPH

Model : PCS 1.5 HP
 Suitable for 4 to 5 Bathrooms
 Supply AC 230 V/50 Hz
 Drive : 1.5 HP
 Total Head : 55 mtrs
 Maximum Discharge : 3500 LPH



(Pump provided with Automatic Pressure Controller)

Mkd. by - **TULLU MARKETING & SALES**

C- 26/34 B-D, Sridham Complex, Ramkatora Road, Varanasi- 221001

E-mail : tullumarketing@gmail.com Website : www.tullutop.com

CUSTOMER CARE : 09935590563

www.facebook.com/tullupumps

www.in.linkedin.com/company/tullu-motors-pvt-ltd

www.instagram.com/tullupumps

www.twitter.com/tullupumps

TULLU TOP

Automatic Pressure BOOSTER PUMP

प्रेशर पम्प
के बिना

प्रेशर पम्प
के साथ



TP-90

TP-120




Features :

- Automatic
- Silent
- No Leakage
- Compact Design
- Space Saving

Check
HOLOGRAM
on Pump

PERFORMANCE CHART :





Applications :

- Individual Showers in Bathroom
- Individual Taps for Domestic Use
- Kitchen
- Geyser
- Water Purifiers
- Washing Machines

Specification :

	TP-90	TP-120
Speed	2280	2580
Max. Head (m)	9	13
Max. Discharge (L/min)	23	60
Gross Weight (Kg)	4.0	5.8
Power (W)	100	248
Volt (V)	220-240	220-240
Frequency (Hz)	50	50
Connection Size (mm)	20	25
(in)	3/4"	1"

(पम्प का प्रयोग केवल पानी का प्रेशर बढ़ाने के लिए किया जा सकता है।)

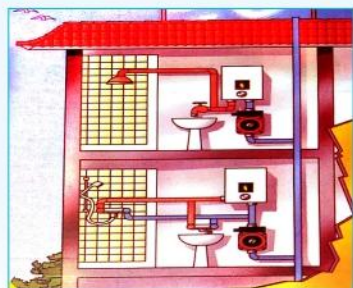

TULLU MOTORS PVT. LTD.

S 9/471, Pandeypur, Varanasi-221002 (U.P.)

E-mail : tullu.motors@gmail.com

Website : www.tullutop.com

Customer Care No.- 09935590563

TULLU TOP

FANS RANGE

Speed Plus

Sweep (mm) 1200
Power Input (Watts) 80
Speed (RPM) 375
Air Delivery (CMM) 200



Himgiri

Sweep (mm) 900/1050/1200/1400
Power Input (Watts) 65/65/75/78
Speed (RPM) 600/400/350/295
Air Delivery (CMM) 160/170/210/245



Speed

Sweep (mm) 900/1200
Power Input (Watts) 75/80
Speed (RPM) 400/375
Air Delivery (CMM) 160/200



Shine

Sweep (mm) 900/1200/1400
Power Input (Watts) 65/75/80
Speed (RPM) 400/350/270
Air Delivery (CMM) 160/200/245



Alpha Power Saver

Sweep (mm) 1200
Power Input (Watts) 60
Speed (RPM) 340
Air Delivery (CMM) 210



Pearl

Sweep (mm) 1200
Power Input (Watts) 75
Speed (RPM) 350
Air Delivery (CMM) 200



Atom

Sweep (mm) 300(12")
Power Input (Watts) 80
Speed (RPM) 2200



Fresh Air

Sweep (mm) 230(9")/ 300(12")
Power Input (Watts) 65/70
Speed (RPM) 2200/2200



Classic

Sweep (mm) 150(6")/200(8")/250(10")
Power Input (Watts) 40/50/50
Speed (RPM) 2250/2000/1350



Mastr

Sweep (mm) 250
Power Input (Watts) 60
Supply Ac 230V/50Hz



Trans Air Heavy Duty

Sweep (mm) 230(9")/ 300(12")
Power Input (Watts) 50/70
Speed (RPM) 1400/1350



Exhaust Fan Heavy Duty

Sweep (mm) 300(12")/ 380(15")/450(18")/600(24")
Power Input (Watts) 90/100/150/135/350/350
Speed (RPM) 1350/900/1350/900/1350/900



Drone ZZ

Supply Ac 230V/50Hz
Sweep 500mm
Watt 75
Speed (RPM) 2800



Swift ZZ

Supply Ac 230V/50Hz
Sweep 500mm
Watt 120
Speed (RPM) 2800



Swift

Supply Ac 230V/50Hz
Sweep 500mm
Watt 120
Speed (RPM) 2800



Drone

Supply Ac 230V/50Hz
Sweep 500mm
Watt 75
Speed (RPM) 2800



Pluto

Supply Ac 230V/50Hz
Sweep 500mm
Watt 150
Speed (RPM) 1400